

### **KEY PRODUCT FEATURES AND BENEFITS**

- Superior construction provides ideal combination of energy efficient operation & powerful refrigeration performance ideal for kegged beverages
- 1000 BTU/hr capacity delivers industry's most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- All stainless steel interior and exterior provide superior durability and easy cleaning
- Forced air refrigeration technology ensures consistent temperature throughout entire keg, maintaining flavor better than other brands

#### **Quick Features:**

- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready doors to match your design style
- Audible door alarm warns user if door is held open
- White LED task lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Accommodates two (2) 1/6 barrels or one (1) 1/4 slim or standard barrel





One 1/4 barrel (standard or slim)

Two 1/6 barrel

Perlick®

# 24" SIGNATURE SERIES

Adara Beverage Dispenser	٢
--------------------------	---

MODEL NUMBERS		HP24TS	
MODEL DESCRIPTION	24" Indoor Beverage Dispenser - Adara Tower		
ATTRIBUTES			
Perlick Anti-Condensation System		NO	
Energy Star Certified		YES	
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	
	Depth - in. (mm)	24" (610 mm.)	
	Height - in. (mm)	34-1/4" (870 mm.)	
STANDARD OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm.)	
	Depth - in. (mm)	24-7/8" (632 mm.)	
	Height - in. (mm)	34-1/2" (876 mm.)	
INTERNAL VOLUME Net. Cu. Ft.		5.2 cu. ft.	
SHIPPING WEIGHT Lbs. (kg.)		222 lbs (100.7 kg.)	
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	
	Running Load Amps	1.9 amps	
	Electrical Connection	Cord connected	
	Cord Plug Type	NEMA 3 Prong 5-15P	
	Cord Length	6'	
	Defrost Initiation	Automatic	
	Defrost Type	Off cycle	
	Thermostat	Digital	
	Lighting Type	LED	
	Refrigerant	R600a (62g)	
REFRIGERATION SPECIFICATIONS	Expansion Device	Capillary Tube	
	Temperature Settings F°(C°)	33° (0.5°) - 48° (8.8°) <b>Factory Set Point</b> 36° (2.2°)	
	Heat Rejection (at 75°F)	450 BTU/hr	
	Pull Down Capacity	1000 BTU/hr	
	Front Vented	Yes	
PLUMBING		None Required	

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

### ACCESSORIES

MODEL NOS.	DESCRIPTION		
(L)	Factory Installed Lock		
66736	Caster Kit for HP24/HC24/HA24 models		
63797	Beer Dispenser Cleaning Kit		
400305	Low Profile Keg Coupler		
67141-1	Perlick Faucet Handle		
BLC4/32	Beer Dispenser Sanitizer (4 oz. or 32 oz.)		

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit **perlick.com.** 

#### 🔔 WARNING: California Prop 65 Notice

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about **Prop 65**, go to **P65Warnings.ca.gov**.



## 24" SIGNATURE SERIES


Adara Beverage Dispenser

CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
HP24TS-4-1L-1A	HP24TS4C-E0-SLF0T	Left	No
HP24TS-4-1R-1A	HP24TS4C-E0-SRF0T	Right	No
HP24TS-4-2L-1A	HP24TS4C-E0-PL00T	Left	No
HP24TS-4-2R-1A	HP24TS4C-E0-PR00T	Right	No
HP24TS-4-1L-2A	HP24TS4C-F0-SLF0T	Left	No
HP24TS-4-1R-2A	HP24TS4C-F0-SRF0T	Right	No
HP24TS-4-2L-2A	HP24TS4C-F0-PL00T	Left	No
HP24TS-4-2R-2A	HP24TS4C-F0-PR00T	Right	No
HP24TS-4-1LL-1A	HP24TS4C-E0-SLFLT	Left	Yes
HP24TS-4-1RL-1A	HP24TS4C-E0-SRFLT	Right	Yes
HP24TS-4-2LL-1A	HP24TS4C-E0-PL0LT	Left	Yes
HP24TS-4-2RL-1A	HP24TS4C-E0-PR0LT	Right	Yes
HP24TS-4-1LL-2A	HP24TS4C-F0-SLFLT	Left	Yes
HP24TS-4-1RL-2A	HP24TS4C-F0-SRFLT	Right	Yes
HP24TS-4-2LL-2A	HP24TS4C-F0-PL0LT	Left	Yes
HP24TS-4-2RL-2A	HP24TS4C-F0-PR0LT	Right	Yes

Form No. Z2697 Rev 11.07.22



24" SIGNATURE SERIES Adara Beverage Dispenser

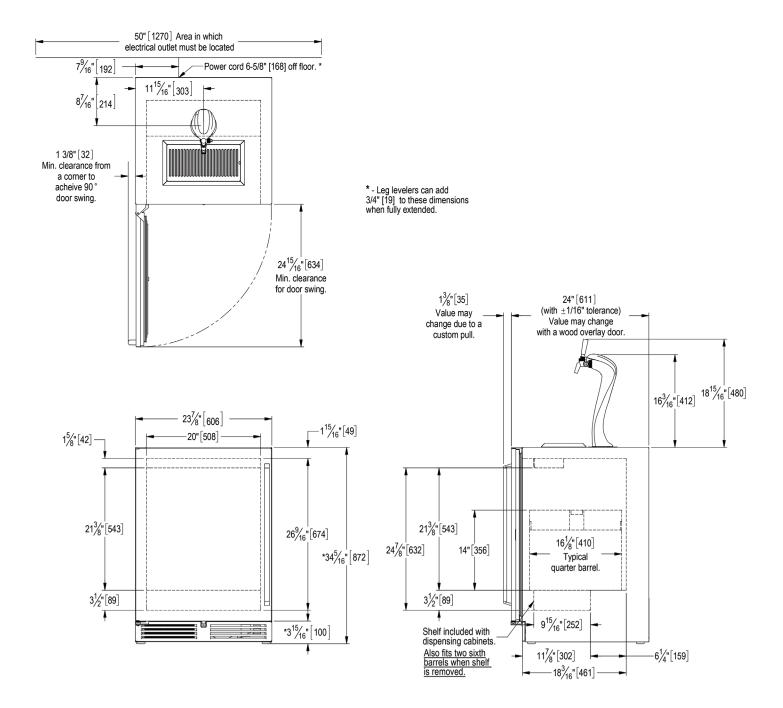

Form No. Z2697 Rev 11.07.22